



**C 150 H**  
**C 150 H x4**

**C 200 H COMPACT**  
**C 200 H**  
**C 200 H x4**

**C 250 H**  
**C 250 H x4**

3,300 - 5,500 Lbs



\* Machines in photos may include some optional equipment




[www.ausa.com](http://www.ausa.com)

AUSA Center, S.L.U. 1 Ctra. de Vic, Km 2.8 - P.O.B. 194, 08243 Manresa - BARCELONA (SPAIN) Tel: +34 93 874 73 11 E-mail: [ausa@ausa.com](mailto:ausa@ausa.com)



AUSA NORTHAMERICA CORP.  
 2655 Le Jeune Road - Suite 808  
 CORAL GABLES FL 33134 (USA)  
 Toll free: 1 800 820 AUSA  
 E-mail: [ausa.corp@ausa.com](mailto:ausa.corp@ausa.com)

DIMENSIONS (ft in)	C 150 H		C 150 H x4		C 200 H		C 200 H COMPACT		C 200 H x4		C 250 H		C 250 H x4	
	C 150 H		C 150 H x4		C 200 H		C 200 H COMPACT		C 200 H x4		C 250 H		C 250 H x4	
A	6 ft 6.3 in	6 ft 7.5 in	6 ft 7.1 in	6 ft 8.7 in	6 ft 9.9 in	7 ft 0.6 in	6 ft 11.5 in							
B	8.6 in	9.8 in	8.1 in	9.6 in	10.6 in	11 in	8.6 in							
C	8.4 in	8.4 in	11.6 in	12.2 in	12.2 in	15.3 in	15.3 in							
D	-	-	4 ft 6.1 in	4 ft 6.1 in	4 ft 6.8 in	4 ft 6.1 in	4 ft 6.8 in							
E (narrow axle)	4 ft 3.3 in	4 ft 3.3 in	4 ft 6.1 in	4 ft 9.5 in	4 ft 9.5 in	4 ft 11.5 in	4 ft 11.5 in							
F (wide axle)	-	-	-	5 ft 10 in	5 ft 10 in	5 ft 11.2 in	5 ft 11.2 in							
G	8 ft 4.3 in	13 ft 1.4 in	9 ft 2.2 in	9 ft 2.2 in	14 ft 5.2 in	9 ft 2.2 in	14 ft 5.2 in							
H	7 ft 8.5 in	8 ft 4.4 in	8 ft 6.4 in	8 ft 6.4 in	9 ft 6.2 in	8 ft 6.4 in	9 ft 6.2 in							
I	4 in	4 in	4 in	4 in	4 in	5.1 in	5.1 in							
J	1.3 in	1.3 in	1.6 in	1.6 in	1.6 in	1.8 in	1.8 in							
K	1 ft 7.6 in	1 ft 7.6 in	2 ft	2 ft	2 ft	2.01 ft	2.01 ft							
L	11 ft 4.4 in	11 ft 4.4 in	13 ft 11 in	13 ft 11 in	13 ft 11 in	13 ft 11.1 in	13 ft 11.1 in							
M	1 ft 3.3 in	1 ft 3.3 in	1 ft 10.8 in	1 ft 10.8 in	1 ft 10.8 in	1 ft 10.8 in	1 ft 10.8 in							
N	5 ft 8.5 in	5 ft 8.5 in	6 ft 0.8 in	6 ft 0.8 in	6 ft 0.8 in	6 ft 0.8 in	6 ft 0.8 in							
O	3 ft 3.3 in	3 ft 3.3 in	3 ft 11.2 in	3 ft 11.2 in	3 ft 11.2 in	3 ft 11.2 in	3 ft 11.2 in							
P	13 ft 11.3 in	18 ft 8.4 in	15 ft 5 in	15 ft 5 in	20 ft 8 in	15 ft 5 in	20 ft 8 in							
Q	10°	10°	13°	13°	13°	13°	13°							

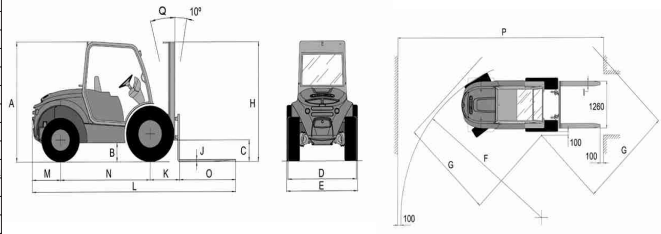

C 150 H - 3,300 Lbs  
C 200 H - 4,400 Lbs  
C 250 H - 5,500 Lbs



	Type of mast	Maximum lifting height (ft in)	Front axle	Free lift (ft in)	Machine height with mast retracted (ft in)				Machine height with mast extended (ft in)				Load (Lb) at max. height						
					C 150 H	C 200 H COMPACT	C 200 H	C 250 H	C 150 H	C 200 H COMPACT	C 200 H	C 250 H	C 150 H	C 200 H COMPACT (narrow axle)	C 200 H (narrow axle)	C 200 H (wide axle)	C 250 H (narrow axle)	C 250 H (wide axle)	
C 200 / 250 H	Duplex (Std.)	10 ft 10 in	Narrow /Wide (op.)	4.7 in	-	-	7 ft 10.3 in	8 ft 0.9 in	-	-	13 ft 7.4 in	13 ft 10 in	-	-	4410	4410	4410	5511	5511
	Duplex	8 ft 6 in	Narrow /Wide (op.)	4.7 in	-	6 ft 7.7 in	6 ft 8.5 in	6 ft 11 in	-	7 ft 11.7 in	11 ft 3.9 in	11 ft 6.4 in	-	-	4410	4410	4410	5511	5511
	Duplex	11 ft 10 in	Narrow /Wide (op.)	4.7 in	-	-	8 ft 4.2 in	8 ft 6.8 in	-	-	14 ft 7.2 in	14 ft 9.8 in	-	-	4410	4410	5070	5291	
	Duplex	14 ft 9 in	Wide	4.7 in	-	-	-	9 ft 9.9 in	10 ft 0.5 in	-	-	17 ft 6.6 in	17 ft 9.2 in	-	-	-	3968	-	4630
C 200 / 250 H	Triplex (free lift)	12 ft 2 in	Narrow /Wide (op.)	3 ft 11.2 in	-	6 ft 7.7 in	6 ft 8.5 in	6 ft 11.5 in	-	15 ft	15 ft 0.7 in	15 ft 3.7 in	-	-	4410	3968	4410	4850	5070
	Triplex (free lift)	14 ft 1 in	Wide	4 ft 4.3 in	-	-	7 ft 4.5 in	7 ft 7.5 in	-	-	17 ft 2 in	17 ft 5 in	-	-	-	-	3968	-	4630
	Triplex (free lift)	17 ft 8 in	Wide	5 ft 6.1 in	-	-	8 ft 6.8 in	8 ft 9.7 in	-	-	20 ft 7.8 in	20 ft 11 in	-	-	-	-	2425	-	2425
C 150 H	Duplex (Std.)	8 ft 8 in	-	0	6 ft 5.7 in	-	-	-	-	10 ft 9 in	-	-	-	3307	-	-	-	-	-
	Duplex	10 ft 10 in	-	0	7 ft 5 in	-	-	-	-	12 ft 10 in	-	-	-	2976	-	-	-	-	-
	Duplex (free lift)	8 ft 6 in	-	4 ft 5.5 in	6 ft 7.7 in	-	-	-	-	10 ft 8.7 in	-	-	-	3307	-	-	-	-	-
	Triplex (free lift)	13 ft 1.4 in	-	4 ft 5.5 in	6 ft 7.7 in	-	-	-	-	15 ft 3.8 in	-	-	-	2645	-	-	-	-	-

TECHNICAL SPECIFICATIONS

	C 150 H / C 150 H x4	C 200 H / C 200 H x4	C 250 H / C 250 H x4
Load capacity (Center of gravity at 24") (Lbs)	2,980 Lb	4,040 Lb	5,060 Lb
Lifting height (Standard duplex mast)	8 ft 9 in	10 ft 10 in	10 ft 10 in
Engine	Diesel (C 150/200 H) / Turbo diesel (C 250 H)	KUBOTA V 1505-E2B	ISUZU 4LE2
Power acc./DIN 6270 B (KW/HP)	23.5 / 32 (2600 rpm)	34.5/46 (2700 rpm)	42.6 / 57 (2700 rpm)
Power acc./DIN 70020 (KW/HP)	25.6 / 34.8 (2600 rpm)	37.5/51 (2700 rpm)	46.3 / 61 (2700 rpm)
N° of cylinders	4	4	4
Cooling system	Water.	Water.	Water.
Traction	4x2 / 4x4	4x2 / 4x2 / 4x4	4x2 / 4x4
Transmission	Hydrostatic with variable flow pump and automatic regulation. Two speed hydrostatic motor. Gear selection switch on joystick. Inching pedal.	Hydrostatic with variable flow pump and automatic regulation. Two speed motor. Gear selection switch on joystick. Inching pedal.	Hydrostatic with variable flow pump and automatic regulation. Gear selection switch on joystick. Inching pedal.
Unladen weight (Lb) (with full tanks)	5,732 Lb	8,378 Lb (4x2) / 8,598 Lb (4x4)	
Gradient negotiable (with full load)	25%	38% (4x2) / 37% (4x4) / 42% (COMPACT)	9,260 Lb (4x2) 9,480 Lb (4x4)
Speed (Maximum) (Mph)	12.42 Mph	12.42 Mph	38% (4x2) / 37% (4x4)
Engine starting system	Electric.	Electric.	12.42 Mph
Tyres	Front: 10.0/75-15.3 (rough terrain). Rear: 6.00-9 (industrial) (4x2) / 23x8.50-12 (rough terrain) (4x4)	10.0/75-15.3 (C 200 H COMPACT) / 11.5/80-15.3 (rough terrain) (C 200/250 H).	Electric. 12.5/80-18 (rough terrain).
Steering	Hydraulic. Working pressure 1900PSI	Hydraulic. Working pressure 2352 PSI	7.00-12 (industrial) (4x2) / 10.0/75-15.3 (rough terrain) (4x4)
External turning circle	8 ft 4.4 in (4x2) / 13 ft 1.4 in (4x4)	9 ft 2.2 in (4x2) / 14 ft 5 in (4x4)	Hydraulic. Working pressure 2352 PSI
Tank capacity (US Gl)	Fuel: 11.88 Hydraulic fluid: 10.56	11.88 13.20	9 ft 2.2 in (4x2) / 14 ft 5 in (4x4) 11.88
Service brake	Hydraulic.	Oil-immersed, multidisc, hydraulically driven.	13.20
Parking brake	Mechanical.	Oil-immersed, multidisc, spring applied and hydraulically released.	Oil-immersed, multidisc, hydraulically driven.
Hydraulic circuit	2 gear pump of 10,6 and 6 cc. Working pressure 200 bar.	18-8 cc. double gear pump. Working pressure 220 bar.	Oil-immersed, multidisc, spring applied and hydraulically released. 18-8 cc. double gear pump. Working pressure 220 bar.
Operating pressures for accessories	2940 PSI	3234 PSI	3234 PSI

STANDARD EQUIPMENT

Open cab. Ergonomic seat. Seatbelt. Joystick. Rotating beacon. 3rd. hydraulic power take-off (PTO) attachment. Side-shift: 4 ft 1.6 in (width). Active security equipment. Audible reverse warning.	Open cab. Ergonomic seat. Seatbelt. Joystick. Rotating beacon. 3rd. hydraulic power take-off (PTO) attachment. Side-shift: 4 ft 1.6 in (width). Active security equipment. Audible reverse warning. Chassis mounted integral belly plate. Narrow front axle
---	---

OPTIONAL EQUIPMENT

Semi-closed cab. Full cab with heater. Front and rear lights. Tyres: Solid, flotation, industrial. Catalytic converter. Spark arrestor. Fuel filter / water separator. 4th. hydraulic power take-off (PTO) attachment. 0.39 Cu. Yd. and 0.52 Cu. Yd. hydraulic buckets. Load backrest / 4 ft 2 in.	Electronic power cut-off. Semi-closed cab. Full cabin with heater. Front and rear lights. Tyres: Solid, flotation, industrial. Wide front axle (NO available for C 200 H COMPACT). Catalytic converter. Spark arrestor. Fuel filter / water separator. 4th. hydraulic power take-off (PTO) attachment. 0.52 Cu. Yd. and 0.78 Cu. Yd. hydraulic buckets. Side-shift: 5 ft 3in (width). Load backrest / 4 ft 2 in and 5 ft 3 in.
---	--